


Name: BLHK12-2PW

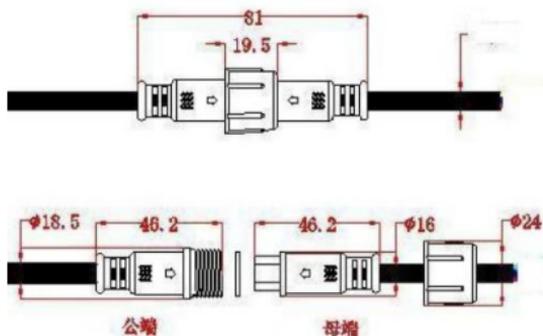

- | | | |
|----|----------------------------|--|
| 1 | Interface Type: | AC / D |
| 2 | Shape: | Round |
| 3 | Production process: | Stamping and welding injection |
| 4 | Features: | Waterproof IP67 |
| 5 | Material contacts: | Copper |
| 6 | Insulator Material: | PVC |
| 7 | Form: | Socket, plug stamping injection Rated voltage: (AC |
| 8 | Current Rating: | 1-20A |
| 9 | Breakdown voltage: | ≥1500V |
| 10 | Working temperature: | (-30 ~ 120 ° C) |
| 11 | Cable length: | Male and female 20cm |
| 12 | Wire cross-sectional area: | 0.5mm ² |

RUICHI